



Head Measurements for Made to Measure Bridle (in inches please)

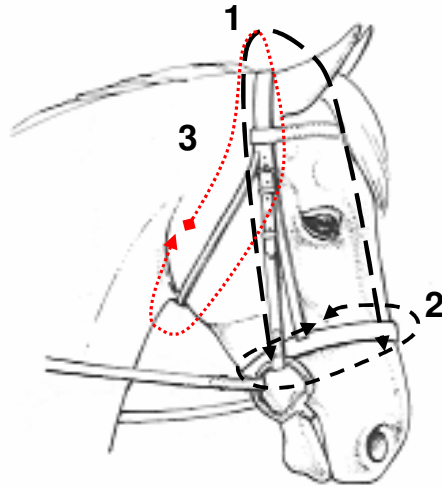

1. Corner of mouth to corner of mouth, over the top of head behind ears. Diameter of usual bit ring also needed.
2. Nose circumference – at position where noseband will lie, and at required tightness
3. Throat circumference – at position where throatlash will lie, and at required tightness
4. Brow – from back of ear base, across brow to other back of ear base i.e. the length of browband end to end.
5. Nose front – from cheek piece line, across nose front at position where noseband will lie, to other cheek piece line
6. Over top of head - base of ear, over top of head to base of other ear.

If it not easy or possible to measure the actual head, the measurements can be taken from a bridle that has been adjusted to fit, just measure the parts required as above. It does not matter what it looks like as the correct adjustment on the straps will be calculated from these measurements. E.g:-

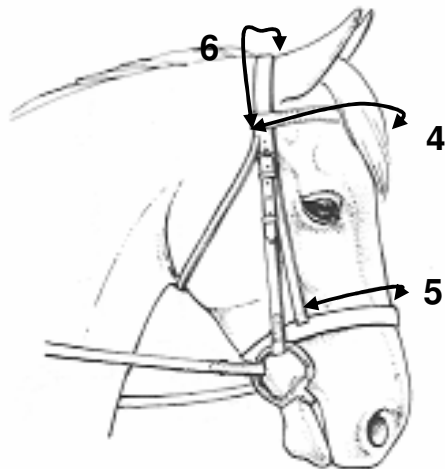

- 1. Measure from top of bit ring, up over head to top of bit ring at other side, following the cheek line.
- 2. & 3. for the noseband/throat circumference – measure from the buckle along the noseband/throat lash to the hole that it is usually fastened on.
- 4. for the browband – measure the end to end length (+ or – if necessary)
- 5. measure the distance across the noseband front between the noseband cheek straps (+ or – if necessary)
- 6. top of head – either measure the distance between the splits of the headpiece (+ or – if necessary) or from the bottom edge of the browband, up over the top of head to bottom edge of brow other side.